



• Specifications

Items	Characteristics	
Temperature range	-55 to +125°C	
Rated voltage range	2.5 to 25Vdc	
Capacitance range	6.8 to 1,500μF	
Capacitance tolerance	±20% [M] (at 20°C, 120Hz)	
Tangent of loss angle	Less than or equal to the value of Standard Ratings (at 20°C, 120Hz)	
Leakage current	Less than or equal to the value of Standard Ratings (at 20°C, after 2 minutes)	
ESR	Less than or equal to the value of Standard Ratings	
Characteristics of impedance	$Z_{+125^{\circ}\text{C}}/Z_{+20^{\circ}\text{C}} \leq 1.25, Z_{-55^{\circ}\text{C}}/Z_{+20^{\circ}\text{C}} \leq 1.25$ at 100kHz 125°C, 1,000 hrs at rated voltage	
Endurance	Appearance	No significant damage
	Capacitance change	Within±20% of the initial value
	Tangent of loss angle (tanδ)	≤150% of the initial specified value
	ESR(mΩ)	≤150% of the initial specified value
	Leakage current	≤The initial specified value
Damp Heat (Steady State)	60°C, 90 to 95% RH, 1,000 hrs, No-applied Voltage	
	Appearance	No significant damage
	Capacitance change	Within±20% of the initial value
	Tangent of loss angle (tanδ)	≤150% of the initial specified value
	ESR(mΩ)	≤150% of the initial specified value
Resistance to soldering heat	VPS (230°C, 75s)	
	Appearance	No significant damage
	Capacitance change	Within±10% of the initial value
	Tangent of loss angle (tanδ)	≤130% of the initial specified value
	ESR(mΩ)	≤130% of the initial specified value
	Leakage current	≤The initial specified value

*In case of some problems for measured values, measure after applying rated voltage for 120 minutes at 125°C


• Size List

(unit: mm)

RV (SV) μF	2.5 (2.9)	4 (4.6)	6.3 (7.2)	10 (11.5)	16 (18.4)	20 (23.0)	25 (28.7)
6.8						6.3×5.9	8×6.9
10						5×5.9	6.3×5.9
15					5×5.9		
22					5×5.9	6.3×5.9	10×7.9
27						6.3×5.9	
33				5×5.9		8×6.9	8×11.9
39		5×5.9			6.3×5.9		
47			5×5.9	6.3×5.9	6.3×5.9	8×6.9	
56				6.3×5.9	8×6.9	10×7.9	10×12.6
68		5×5.9				10×7.9	
82			6.3×5.9		8×6.9		
100			6.3×5.9		10×7.9	8×11.9	8×11.9
120			6.3×5.9	8×6.9			
150		6.3×5.9		8×6.9 10×7.9	10×7.9	10×12.6	10×12.6
180					8×11.9 10×7.9		
220	6.3×5.9		8×6.9 10×7.9				
270				10×7.9			
330			8×6.9	10×7.9	8×11.9 10×7.9	10×12.6	
470	8×6.9		8×11.9 10×7.9			10×12.6	
560		8×11.9		10×12.6			
680	8×11.9	10×7.9					
820			10×12.6				
1000			10×12.6				
1200		10×12.6					
1500	10×12.6						

RV: Rated Voltage [V] SV: Surge Voltage [V] (at room temperature)

• Marking and Dimensions

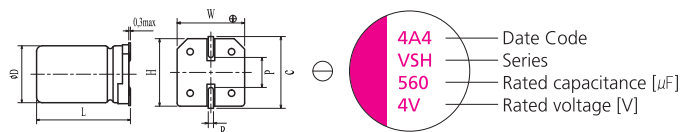


(unit: mm)

Size	∅D±0.5	L +0.1 -0.4	W±0.2	H±0.2	C±0.2	R	P±0.2
5×5.9	5.0	5.9	5.3	5.3	6.0	0.6~0.8	1.4
6.3×5.9	6.3	5.9	6.6	6.6	7.3	0.6~0.8	2.1
8×6.9	8.0	6.9	8.3	8.3	9.0	0.6~0.8	3.2
10×7.9	10.0	7.9	10.3	10.3	11.0	0.6~0.8	4.6
8×11.9	8.0	11.9	8.3	8.3	9.0	0.8~1.1	3.2
10×12.6	10.0	12.6	10.3	10.3	11.0	0.8~1.1	4.6

• Recommended Land Pattern Dimension of PCB

(unit: mm)



Size	a	b	c
5×5.9	1.4	7.4	1.6
6.3×5.9	2.1	9.1	1.6
8×6.9	2.8	11.1	1.9
10×7.9	4.3	13.1	1.9
8×11.9	2.8	11.1	1.9
10×12.6	4.3	13.1	1.9

• Standard Ratings

Rated Voltage [Vdc]	Rated Capacitance [µF]	Size ØD x L [mm]	ESR (20°C, 100kHz) [mΩ] [max.]	Rated Ripple Current (100kHz)[mArms]		Tangent of Loss Angel [max]	Leakage Current [µA, max]	Part Number
				-55 to +105°C	+105 to +125°C			
2.5	220	6.3 x 5.9	23	2390	756	0.10	110	2VSH220MC6
	470	8 x 6.9	23	3300	1044	0.10	235	2VSH470MD7
	680	8 x 11.9	13	4520	1430	0.10	340	2VSH680MD12
	1500	10 x 12.6	12	5440	1721	0.10	750	2VSH1500ME12
4	39	5 x 5.9	70	1100	348	0.10	78	4VSH39MB6
	68	5 x 5.9	60	1400	443	0.10	136	4VSH68MB6
	150	6.3 x 5.9	40	1810	572	0.10	120	4VSH150MC6
	330	8 x 6.9	35	2560	810	0.10	264	4VSH330MD7
	560	8 x 11.9	13	4520	1430	0.10	448	4VSH560MD12
	680	10 x 7.9	25	3700	1170	0.10	544	4VSH680ME8
	1200	10 x 12.6	12	5440	1721	0.10	960	4VSH1200ME12
	47	5 x 5.9	70	1100	348	0.10	148	6VSH47MB6
6.3	82	6.3 x 5.9	45	1700	537	0.10	103	6VSH82MC6
	100	6.3 x 5.9	40	1810	572	0.10	126	6VSH100MC6
	120	6.3 x 5.9	40	1810	572	0.10	151	6VSH120MC6
	220	8 x 6.9	35	2560	810	0.10	277	6VSH220MD7
	220	10 x 7.9	25	3700	1170	0.10	277	6VSH220ME8
	330	10 x 7.9	25	3700	1170	0.10	416	6VSH330ME8
	470	10 x 7.9	25	3700	1170	0.10	592	6VSH470ME8
	470	8 x 11.9	15	4210	1332	0.10	592	6VSH470MD12
	820	10 x 12.6	12	5440	1721	0.10	1033	6VSH820ME12
	1000	10 x 12.6	12	5440	1721	0.10	1260	6VSH1000ME12
10	33	5 x 5.9	70	1100	348	0.10	165	10VSH33MB6
	47	6.3 x 5.9	50	1620	512	0.10	94	10VSH47MC6
	56	6.3 x 5.9	45	1700	537	0.10	112	10VSH56MC6
	120	8 x 6.9	35	2560	810	0.10	240	10VSH120MD7
	150	8 x 6.9	35	2560	810	0.10	300	10VSH150MD7
	150	10 x 7.9	30	3020	955	0.10	300	10VSH150ME8
	270	10 x 7.9	25	3700	1170	0.10	540	10VSH270ME8
	330	8 x 11.9	17	3950	1250	0.10	660	10VSH330MD12
	330	10 x 7.9	25	3700	1170	0.10	660	10VSH330ME8
	560	10 x 12.6	13	5230	1655	0.10	1120	10VSH560ME12
16	15	5 x 5.9	120	1020	322	0.10	120	16VSH15MB6
	22	5 x 5.9	90	1060	335	0.10	176	16VSH22MB6
	39	6.3 x 5.9	50	1620	512	0.10	125	16VSH39MC6
	47	6.3 x 5.9	50	1620	512	0.10	150	16VSH47MC6
	56	8 x 6.9	45	1890	598	0.10	179	16VSH56MD7
	82	8 x 6.9	40	2120	670	0.10	262	16VSH82MD7
	100	10 x 7.9	35	2670	845	0.10	320	16VSH100ME8
	150	10 x 7.9	30	3020	955	0.10	480	16VSH150ME8
	180	8 x 11.9	20	3640	1151	0.10	576	16VSH180MD12
	180	10 x 7.9	30	3020	955	0.10	576	16VSH180ME8
20	330	10 x 12.6	16	4720	1493	0.10	1056	16VSH330ME12
	470	10 x 12.6	16	4720	1493	0.10	1504	16VSH470ME12
	10	5 x 5.9	120	1020	322	0.10	100	20VSH10MB6
	22	6.3 x 5.9	60	1450	458	0.10	88	20VSH22MC6
	27	6.3 x 5.9	60	1450	458	0.10	108	20VSH27MC6
	33	8 x 6.9	45	1890	598	0.10	132	20VSH33MD7
	47	8 x 6.9	45	1890	598	0.10	188	20VSH47MD7
	56	10 x 7.9	40	2400	759	0.10	224	20VSH56ME8
	68	10 x 7.9	40	2400	759	0.10	272	20VSH68ME8
	100	8 x 11.9	24	3320	1050	0.10	400	20VSH100MD12
25	150	10 x 12.6	20	4320	1367	0.10	600	20VSH150ME12
	6.8	6.3 x 5.9	80	1200	377	0.10	85	25VSH6R8MC6
	10	8 x 6.9	60	1500	471	0.10	125	25VSH10MD7
	22	10 x 7.9	50	2000	632	0.10	275	25VSH22ME8
	33	8 x 11.9	30	2980	943	0.10	413	25VSH33MD12
	56	10 x 12.6	28	3800	1202	0.10	700	25VSH56ME12
	100	8 x 11.9	30	3320	1050	0.10	500	25VSH100MD12
	150	10 x 12.6	25	4320	1367	0.10	750	25VSH150ME12

Conductive Polymer Hybrid Aluminum Electrolytic Capacitors Radial Lead Type

Conductive Polymer Hybrid Aluminum Electrolytic Capacitors SMD Lead Type

Conductive Polymer Aluminum Electrolytic Capacitors Radial Lead Type

Conductive Polymer Aluminum Electrolytic Capacitors SMD Lead Type